

4EB0700




Electromechanical 2-post lifts with base 3.600 kg. Symmetric arms

Suitable for any type of cars and repairs



Distance between posts	2.700 mm.
Load capacity	3.600 kg.
Pick up height	115 mm.
Pads height	190 mm
Max. Lifting height	2.055 mm
Lifting time	60 s
Arms length (min-max)	830 – 1200 mm
Overall width	3.200 mm.
Motor	3 phases 230/400 V 50 Hz. 3 KW

3 phases 60 Hz version: **4EB0762**

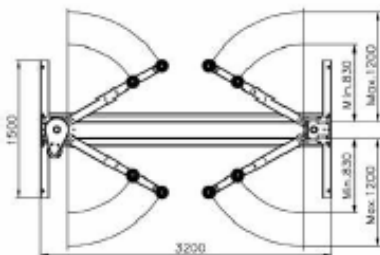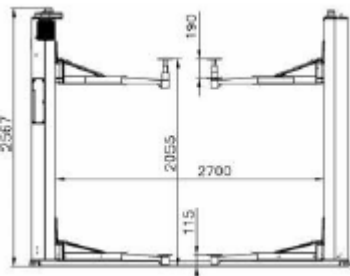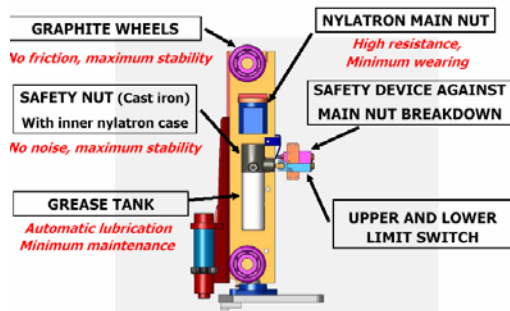

GENERAL FEATURES & SAFETY SYSTEMS

- **Homologated and certified** product according to the European Directive 2006/42/CE.
- **Maximum resistance:** "T" Innovative bending design of columns without longitudinal welds.
- **No wearing:** main nut made of Nylatron.
- **Minimum noise:** Nylatron case fitted inside safety nut..
- **Low maintenance:** Automatic and permanent lubrication of the spindles and nuts.
- **Maximum stability:** No block sliders. Each carriage is equipped with four wheels to guarantee the minimum friction inside columns permitting a stable lifting and lowering.
- Safety system against obstacles on lowering
- Safety device against breakage or wear of main nut.
- Automatic arms blockage.
- Thermal detector on motor against overheating.
- Upper and lower height limit switches.
- High resistant spindles made of special laminated steel.
- Manual lowering of arms in case of energy absence.
- Safety mechanism against breakage or looseness of the drive chain.
- Push buttons at 24 V, type "dead man" safety control, separated switches up/down.
- Products tested before delivery from factory.



TRADEMARK AWARD
HONOURING THE TOP
QUALITY AND BEST
SERVICE IN VEHICLE LIFTS

