


4EP0100/51

2-post lifts 2.500 Kg. Parking model with Base

Suitable for any type of cars

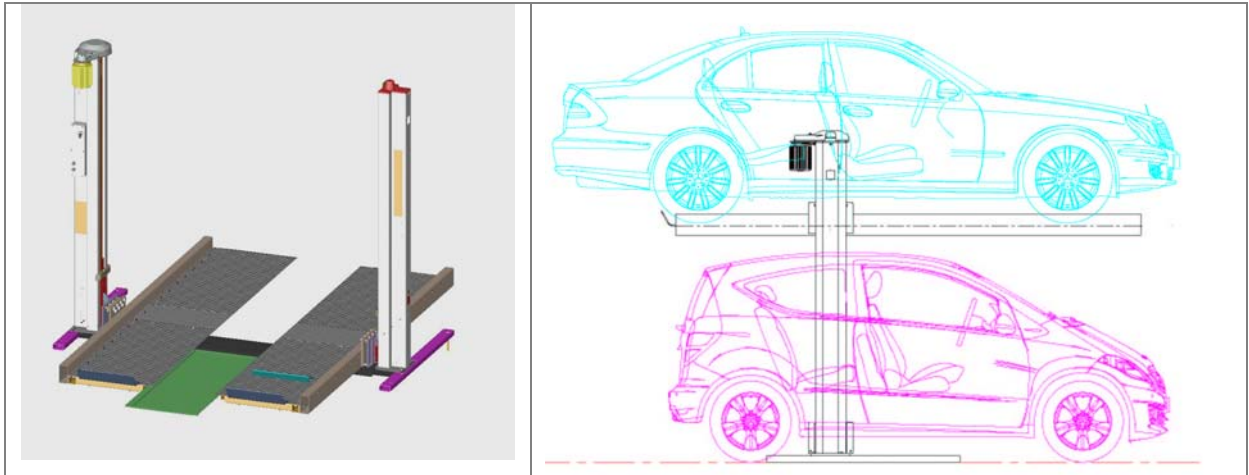

	4EP0100	4EP0151
Maximum large		4.151 mm
Maximum width		3.000 mm
Minimum Lifting height		3.500 mm
Maximum Pick up height		1.787 mm
Platform measures (LxW)		3.400 x 670 mm
Minimum width between columns		2.500 mm
Maximum width vehicle		2.060 mm
Lifting time		50 seconds
Motor	Three Phase 230/400V. 50Hz. 3 Kw.	Single Phase 230V. 50 Hz. 2.2 Kw

GENERAL FEATURES & SAFETY SYSTEMS

- **Homologated and certified** product according to the European Directive 98/37/CE.
- **Maximum resistance:** "T" Innovative bending design of columns without longitudinal welds.
- **No wearing:** main nut made of Nylatron.
- **Minimum noise:** Nylatron case fitted inside safety nut.
- **Low maintenance:** Automatic and permanent lubrication of the spindles and nuts.
- **Maximum stability:** No block sliders. Each carriage is equipped with four wheels to guarantee the minimum friction inside columns permitting a stable lifting and lowering.
- Safety system against obstacles on lowering
- Safety device against breakage or wear of main nut.
- Automatic arms blockage.
- Thermal detector on motor against overheating.
- Upper and lower height limit switches.
- High resistant spindles made of special laminated steel.
- Manual lowering of arms in case of energy absence.
- Safety mechanism against breakage or looseness of the drive chain.
- Push buttons at 24 V, type "dead man" safety control, separated switches up/down.
- High quality pre-regulated drive-chain with safety system for its tension control.

